




**Pump unit
GMA**




Application:

Pump unit in centralized lubrication systems

- adjustable delivery volumes
- with monitoring device
- with up to 4 pump elements
- usable for delivery of oil, semi-fluid grease or grease

- Subject to modifications -

Reservoir size Reservoir	2 or 4 l transparent	4 or 7 l stainless steel	5 or 10 l Polyester
Pump unit GMA-B Drive by means of 24 V direct current motor			
Pump unit GMA-C Drive by means of three-phase current motor			
electrical level control (alternativ)	for grease NLGI-class 1 and 2 (intermittently signal) for oil (float switch)	for grease NLGI-class 1 and 2 (intermittently signal) for oil (float switch)	for grease NLGI-class 1 and 2 (static signal) for oil (float switch)

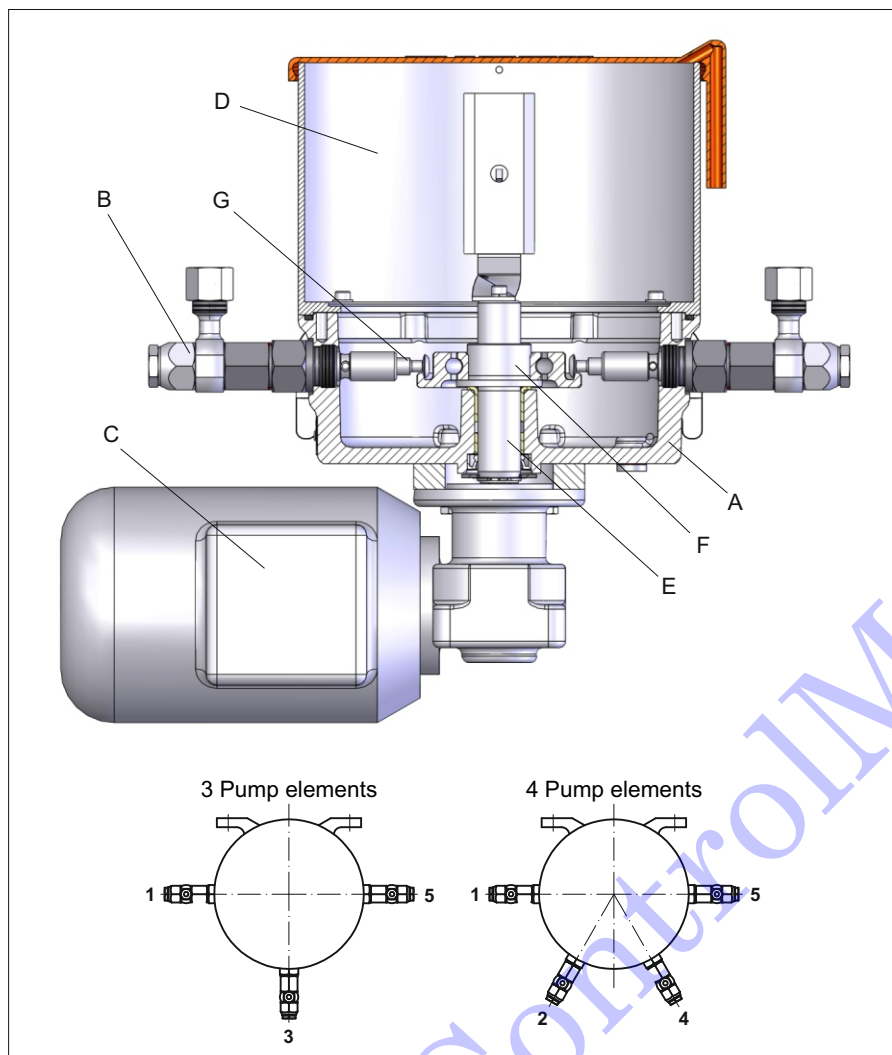

Description:

Actuation:

The pump unit GMA is actuated by a three-phase A.C. motor or a D.C. motor (C), which is flanged to the pump casing (A) from the bottom.

Pump:

At the radial piston pump there are up to four pump elements (B) arranged radially around an eccentric (F), which is surrounded by a rolling bearing. On rotation of the actuator or the eccentric shaft (E) respectively the pump piston (G) of each pump element designs a suction or a delivery stroke per revolution and thus delivers the lubricant out of the reservoir (D) to the lubricating points. The delivery volume can be adjusted at each pump element individually. Depending on the operation (lubricant, lubricant supply etc.) the pump unit can be equipped with different pump elements, reservoir and monitoring units.

Operating instructions:

For the lubrication pumps only clean oil or grease from original containers may be used. If, before putting into operation, the lubricant is not filled through the filling nipple, the pump must be filled up to the vane with gear oil during initial filling to ensure good venting. The lubricant lines must be clean and free from obstructions. Do not connect them to the lubrication points before the lubricant emerging from the lines is free from air bubbles. Check all connections of the pressure lines for leakages.

Lubricant: The intended lubricant must be suitable for use with centralized lubrication equipment.

Technical data general:

adm. delivery pressure: max. 250 bar

Number of pump elements: 1 ... 3

Installation at place 1, 3, 5

Number of pump elements: 1 ... 4

Installation at place 1, 2, 4, 5

Delivery capacity per stroke and element

in case of pump element ø6: 0,08 cm³

in case of pump element ø8: 0,15 cm³

special pump element 0,22 cm³

(on request)

Temperature range

GMA-B: -20 ... +60 °C

GMA-C: -20 ... +40 °C

In case of low temperatures the grease penetration shall be regarded.

Inserting position: vertically

Material

Housing: Aluminium

Pump element: Steel, galvanized

Gaskets: NBR

Medium: Oil and grease up to NLGI-class 2
(Mind the using conditions applicable to the reservoir and level monitoring utility!)

GMA-B:

Electrical data (motor):

Connecting voltage: 24 VDC

Current: max. 2,5 A

Number of rotations (depending on load)

Connecting voltage 24 V

when connected

to 1 and 3:

approx. 27 min⁻¹


Connecting voltage 12 V

when connected

to 1 and 2:

approx. 18 min⁻¹

Connection scheme:



GMA-C:

Electrical data (motor):

Connecting voltage: 230/400 V (Δ/λ)

Mains frequency: 50 Hz

System of protection: DIN EN 60529 IP55

Insulating category: F

Special voltage upon request

Rotations at the pump shaft	Rated power	Rated current 230/400 V
① n = 1 min ⁻¹	45 W	0,31/0,18 A
④.5 n = 4,5 min ⁻¹	45 W	0,31/0,18 A
②5 n = 25 min ⁻¹	90 W	0,78/0,45 A

Fig. 1 Suction stroke


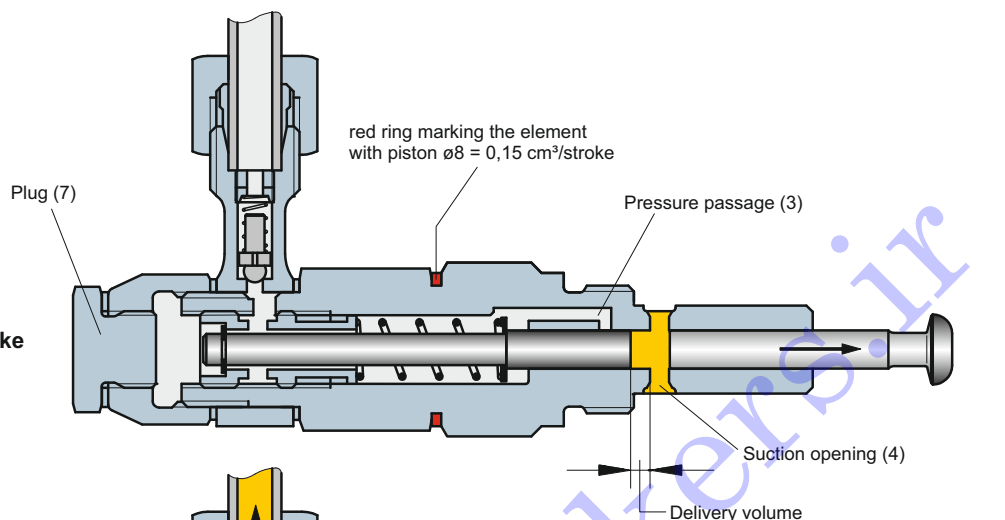


Fig. 2 Delivery stroke

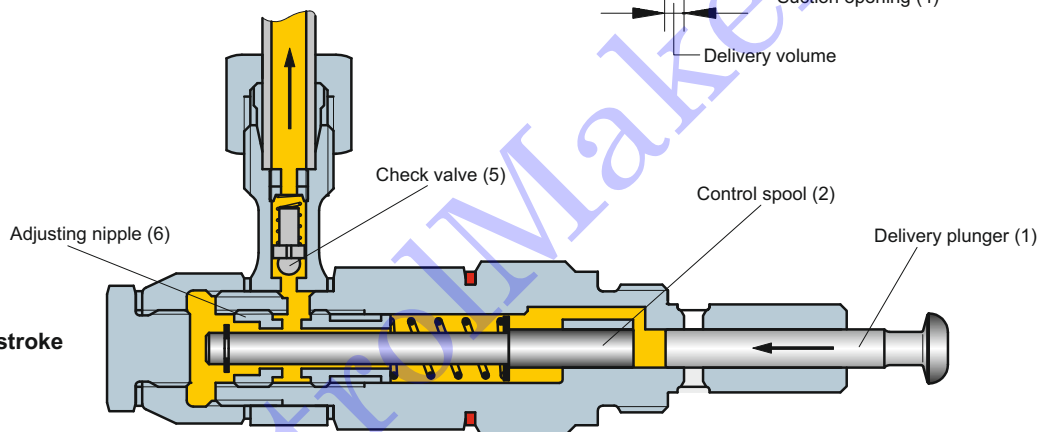

Operation of pump elements:

The suction stroke (fig. 1) is accomplished by the delivery piston (1) and the control piston (2). During that operation the delivery piston (1) is actuated by the eccentric shaft, and the control piston (2) by the spring. The control piston closes the pressure hole (3) and, depending on the set delivery capacity, remains at a certain position. With the delivery piston moving on, a vacuum will build up within the dosage area. After opening the suction hole (4) by the delivery piston, the lubricant starts to be sucked off the reservoir.

In case of pressure stroke (fig. 2) the delivery piston (1) moves to the left. As a result, the suction hole (4) will be closed with the lubricant available between the delivery and control pistons (2) being shifted until it clears the pressure hole (3) and the lubricant is delivered through the delivery piston up to the outlet. The pumps are supplied with their delivery capacities being set at maximum, i.e. at full stroke setting.

Delivery volume adjustment:


The **delivery volume** can be reduced to minimum of appr. 25% of the rated one. After having removed lock screw (7), the stroke is to be changed by means of the enclosed spanner through adjustment nipple (6). When turning the nipple to the right, delivery volume will decrease. At the adjustment nipple, there is a hexagon against which a spring loaded piston is pressing radially. Thus, any independent change of the delivery volume will be prevented. At the same time, the latching serves as a measure for setting the delivery volume. Six latches equal one rotation of the adjustment nipple and a reduction of the nominal delivery volume by appr. 33%. Precise setting to a specific delivery volume per stroke must ensue, based on volumetric measurements.



The element with a piston diameter of 8 mm = 0.15 cm³/stroke is marked with a red ring (see fig. 1).

Installation of pump elements:

If another pump element is to be installed in the lubrication pump subsequently, proceed as shown in the drawing on the right:

Insert pump element at an upwards inclination into the locating hole with the plunger pulled out about half way. To facilitate installation and putting into operation, fill the bore taking up the plunger with grease. Bring into horizontal position and screw in only after the plunger head abuts the pressure ring and engages in the groove of the pressure ring.

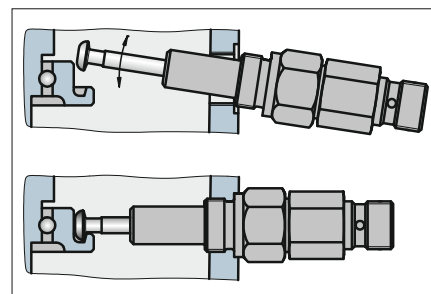

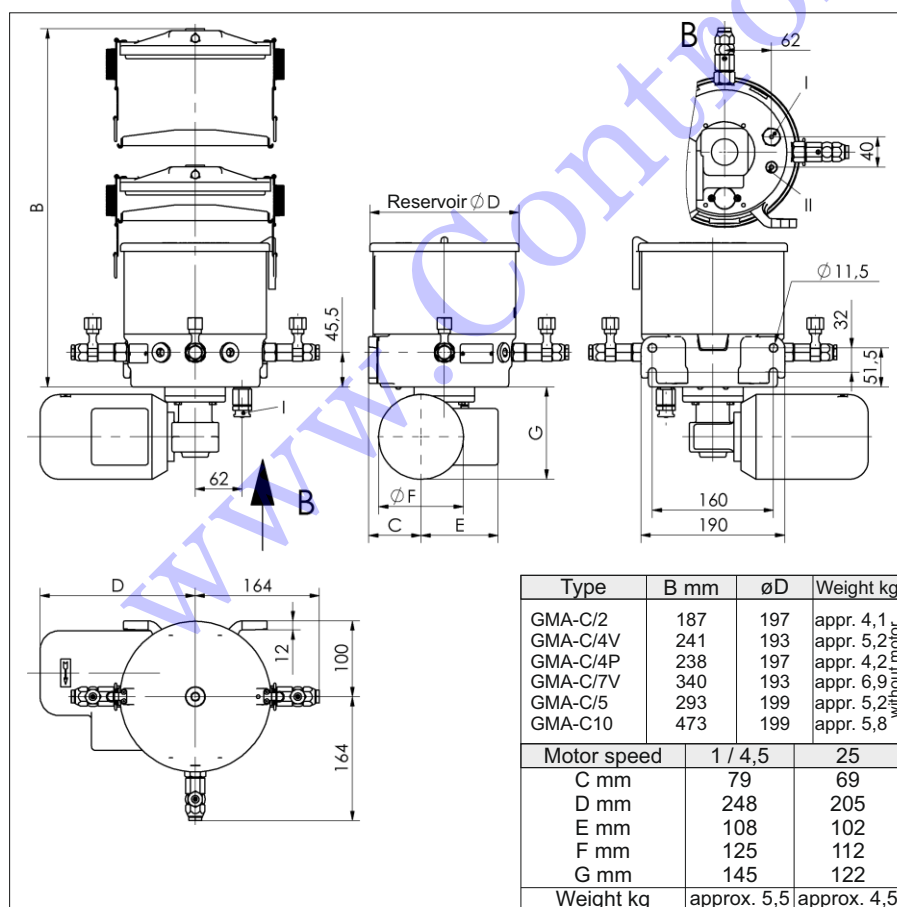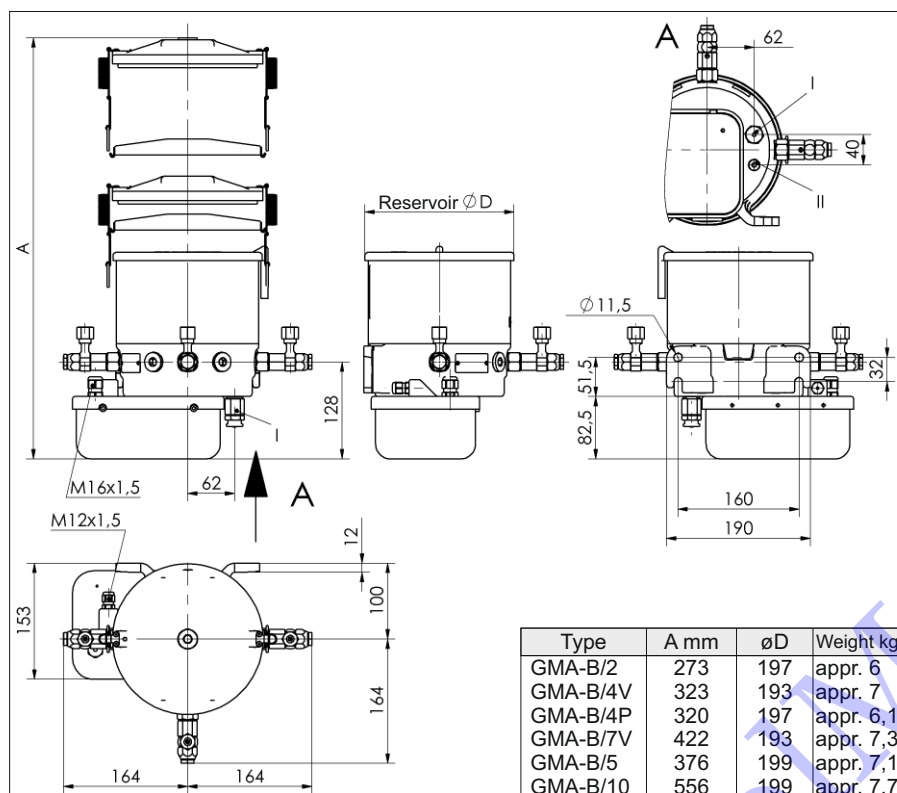

Reservoir / level monitoring:

Reservoir capacity	Level monitoring options
2 l (2)	Float: at min. level (F/0)
4 l (4P, 4V)	Proximity switch: Signal intermit. tently, min. level (C/0)
7 l (7V)	Float: at min. and max. level (F/0) Proximity switch: Signal intermit. tently, min. level (C/0)
5 l (5)	Float: at min. and max. level (F/0)
10 l (10)	Follow-up piston: at min. and max. level (F/K)


Level monitoring	suitable for delivery of
without level monitoring (0/0)	Oil as of 20 cP grease up to NLGI-cl. 2
Float (F/0)	Oil as of 20 cP
Proximity switch (C/0)	Grease of NLGI-cl. 1 and 2
Follow-up piston (F/K)	Grease of NLGI-cl. 1 and 2

Reservoir capacity	Reservoir material
2 l (2)	Polyamide transparent
4 l (4P)	Polyamide transparent
4 l (4V)	stainless steel
7 l (7V)	
5 l (5)	Polyester fibreglass reinforced
10 l (10)	

When using a "K" sequence piston, the utilisable reservoir capacity decreases by approx. 2,5 l.

Remark on the dimensional drawings:


I = Filling connector
(Connection thread G 3/8)
II = Return connector G 1/8

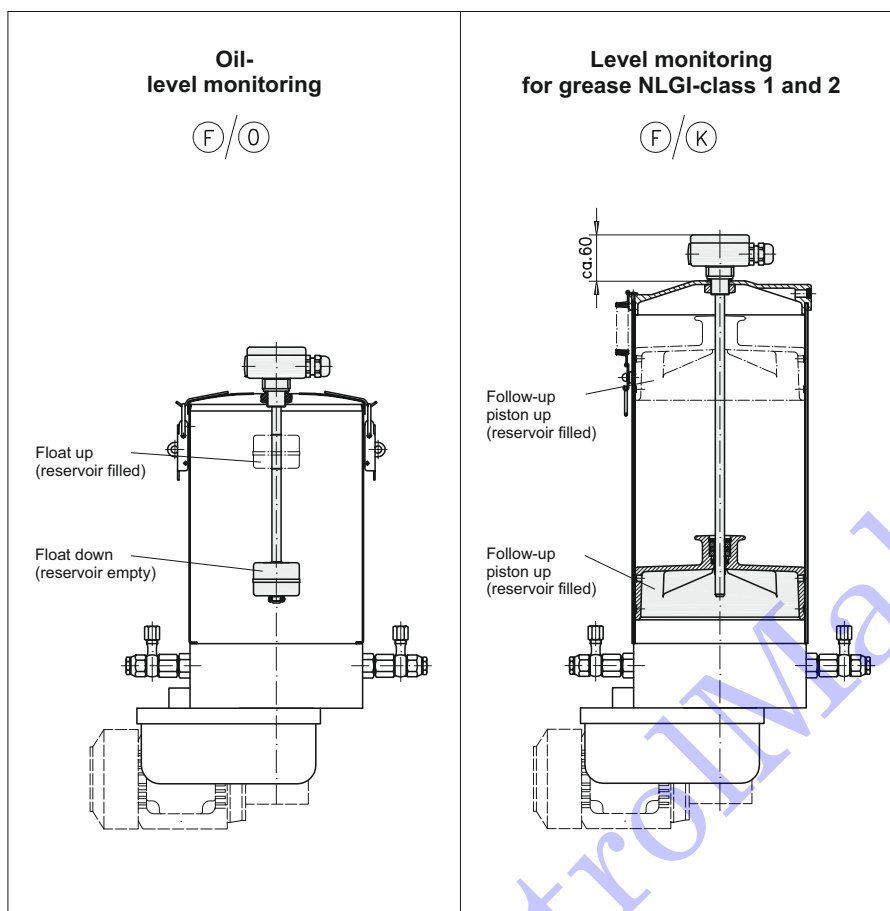


Electrical data level monitoring (F)

Switching data:
 Switching power: max. 40 W / 60 VA
 Switching voltage: max. 230 VUC
 Switching current: max. 0,5 A
 * In case of d.c. with inductive load a protective circuit shall be provided for.
 System of protection: DIN EN 60529 IP65
 Type of connection: Terminal box
 Cable gland: M16x1,5
 Wire cross section: 0,5 ... 1,5 mm²

Connection diagram level monitoring (F)

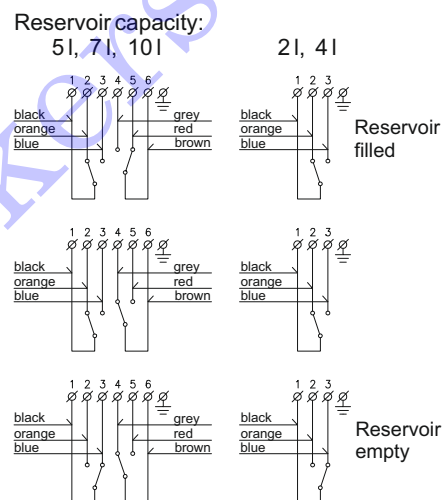

Grease-level monitoring via proximity switch (C1) (C2)

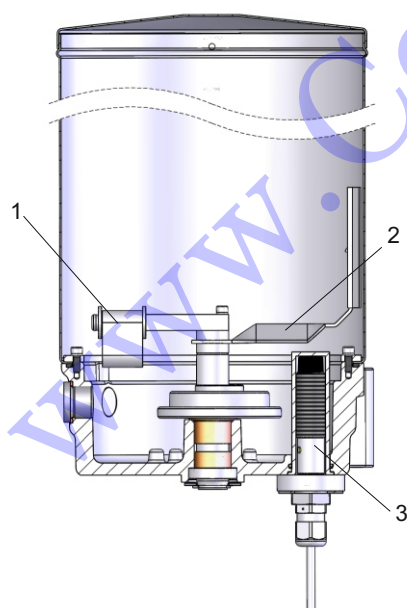


The grease inside the reservoir causes to lift up the actuating flap (1) upon rotation of the pump driving shaft. No signal will be given.

In case of an empty reservoir and a rotating pump driving shaft the actuating flap (1) will intermittently attenuate the proximity switch (3).

In case of full reservoir, the actuating flap, depending on grease penetration, may fall during standstill and attenuate the proximity switch (3).

Therefore, when evaluating the proximity switch signal, it should be ensured that the proximity switch signal is evaluated delayed (by approx. 10 s).

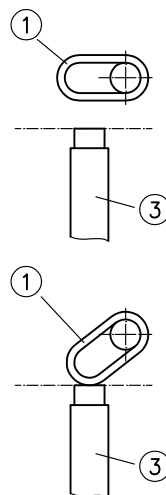

Electrical data level monitoring

by proximity switch with cable (C1)

by proximity switch with plug (C2)


Operating voltage: 10 ... 30 VDC
 Residual ripple: ≤10%
 Load current: max. 200 mA
 Inherent power consumption: approx. 7,5 mA
 Potential drop: ~0,8 V

The "empty" signal will be intermittently. The function of monitoring "C" has been tested with mineral oil-based lubricants successfully. In case of special lubricants, suitability needs to be tested.

Type of connection:

- (C1) GMA-B: Terminal strip
 GMA-C: Cable 3 m
- (C2) GMA-B: (not possible)
 GMA-C: Unit plug M12x1, 4-pin (for associated cable socket see "auxiliaries")

Connection scheme: Proximity switch with cable (C1) with plug (C2)

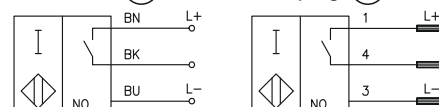

Remark on functional principle:

- 1 Actuating flap
- 2 Agitator blade
- 3 Proximity switch

Pump unit GMA

EUGEN WOERNER GmbH & Co. KG
 Postfach 1661 DE-97866 Wertheim
 Hafenstrasse 2 DE-97877 Wertheim
 Tel. +49 9342 803-0 info@woerner.de
 Fax +49 9342 803-202 www.woerner.de

Data sheet

P0301 EN

Page 5 of 8

Order designation:

					On special voltage Voltage and frequency					
Drive	Reservoir size	Level monitoring	Follow-up piston	Filling connection	Pump element ^{3) 5)}					Number of revolution pump shaft ²⁾
					Place 1	Place 2	Place 3	Place 4	Place 5	
Direct current motor 24 V GMA-B01	2 l (Polycarbonate) (2)	without monitoring (0)	without (0)	Flat lubrication nipple ⁴⁾ AM16x1,5 DIN 3404 (C)	Pump element 6 with pipe connection					GMA-B: no sign
	4 l (Polyamide) (4P)	For oil: Min. level monitoring at reserv. (2) (4P) (4V) Min. and max. level monitoring at reservoir (5) (7V) (10)		ø6 (66) ø8 (68) ø10 (610)	ø6 (66) ø8 (68) ø10 (610)	ø6 (66) ø8 (68) ø10 (610)	ø6 (66) ø8 (68) ø10 (610)	ø6 (66) ø8 (68) ø10 (610)		
	4 l (stainless steel) (4V)	without stirrer blade (F) with stirrer blade (F1)		Nipple for snap (counterpart see accessories) (D)	Pump element 8 with pipe connection					GMA-C: 1 min ⁻¹ (1)
	7 l (stainless steel) (7V)	For grease: Intermittent min. level monitoring for all reservoirs ¹⁾ (C1) (C2)		without (0)	ø6 (86) ø8 (88) ø10 (810)	ø6 (86) ø8 (88) ø10 (810)	ø6 (86) ø8 (88) ø10 (810)	ø6 (86) ø8 (88) ø10 (810)	ø6 (86) ø8 (88) ø10 (810)	
Three-phase current motor 400 V / 50 Hz or special voltage GMA-C01	5 l (Polyester) (5)	For grease: Min. / max. level monitoring at reservoir (5) and (10)	with (K) without (K)	Cone lubrication nipple ⁴⁾ (F)	without pump element, place of installation closed					4,5 min ⁻¹ (4,5)
	10 l (Polyester) (10)	with (F) without (0)		(0)	(0)	(0)	(0)	(0)		
				without pump element, place of installation not closed (open treaded bore)					25 min ⁻¹ (25)	
					(L)	(L)	(L)	(L)	(L)	

- Subject to modifications -

¹⁾ "C2" level monitoring possible on GMA-C only

²⁾ For speed of GMA-B motor please see "technical data"

³⁾ Pump element with larger delivery volume on request:
0,22 cm³/stroke Order-no. **110.990-65**
⁴⁾ Not for oil suitably

⁵⁾ When attaching pump elements at the locations 2 and 4, never mount another pump element at location 3, then.


Order example:

Pump unit GMA-C01 with reservoir size 2 l and level monitoring for oil, filling connection "D", pump element 8 with pipe connection ø8 at place 1 and pump element 6 with pipe connection ø8 at place 5, motor rotations 4,5.


Order designation:
GMA-C01/00/2/F/0/D/88/0/0/0/68/4,5

Accessories: (please order separately)


Counterpart to filling connection "D"
Order-no. **110.135-65**

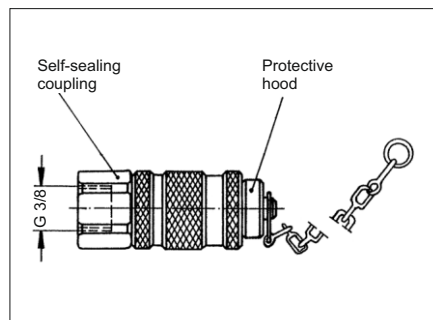

Cable socket for level monitoring "C2"
with LED, with cable 5 m
Order-no. **913.404-19**

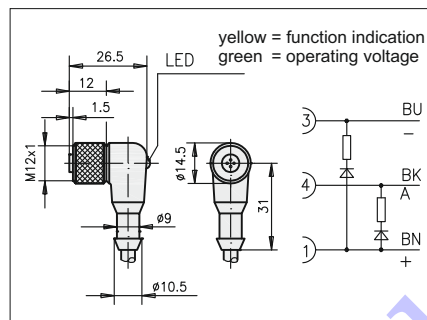

Cable socket for level monitoring "C2"
without LED, packageable
Order-no. **913.404-24**

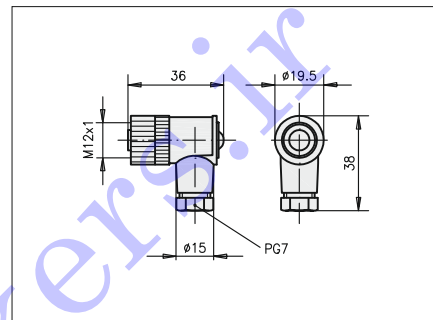

Cable cross section: 3x0,34 mm²
Operating voltage: 10 ... 30 VDC
System of protection: DIN EN 60529 IP68
Ambient temperature: -40 ... +90 °C

Connecting type: Screws
Connecting cross section: 0,75 mm²
Cable cross section: max. 4 ... 6 mm
Cable gland: Pg7
System of protection: DIN EN 60529 IP67
Ambient temperature: -40 ... +85 °C

Function indication:

Order-no.	Depiction	Mounting place	Use
752.528-69		Instead of a pump element	Optical function control Function see data sheet P0809
Bracket for proximity switch 752.528-73 M8x1 752.528-74 M12x1		To the function indication	Electrical operating control

For more informations see
Operation manual B0301
List of spare parts E0301

- Subject to modifications -



Important information about this data sheet

Reproduction, also in extracts, only permitted with the approval of the firm of EUGEN WOERNER GmbH & Co. KG.

All the information in this data sheet has been examined for correctness with great care. Nevertheless, WOERNER cannot assume any liability for losses or damage resulting directly or indirectly from the application of the information contained in this data sheet.

All products from WOERNER may only be used as intended and corresponding to the information in this data sheet.

For products supplied with operating instructions, the additional directives and information contained in them are to be complied with.

Materials deviating from those mentioned in this data sheet and the technical documents which further apply may only be poured into and processed in the appliances and systems manufactured and supplied by WOERNER by following agreement with and written approval by WOERNER.

The safety and danger information stated in the safety data sheets of the substances used must be taken into account at all costs.

Transportation of gases, liquefied gases, gases under pressure, vapours and liquids, the vapour pressure of which is more than 0,5 bar above normal atmospheric pressure (1013 mbar) at the maximum admissible temperature, of easy inflammable or explosive media as well as transportation of foodstuffs is forbidden.

Information on EU Directive 2002/95/EC (RoHS)

With Directive 2002/95/EC of January 27, 2003, for the limitation of the use of certain hazardous substances in electrical and electronic devices (RoHS) material bans come into effect from July 2006 for electrical and electronic devices newly placed on the market for lead, cadmium, hexavalent chromium, mercury and brominated flame retardants.

In its controls and switching devices, WOERNER only uses materials which fulfil the criteria of EU Directive 2002/95/EC.

To the extent that hexavalent chromium has been used as corrosion protection in the parts which we produce ourselves, it has already been replaced by other environmentally tolerable protective measures.

The mechanical devices supplied by WOERNER are not affected by EU Directive 2002/95/EC.

But as WOERNER is conscious of its responsibility towards the environment, we shall also use materials fulfilling the requirements of the Directive for devices not covered by EU Directive 2002/95/EC as soon as they are generally available and their use is technically possible.

Technical documents also valid for this product:

B0301 Operating instructions GMA-B, -C