


Solenoid valve (3/2 way)

3V200 Series




Symbol



Product feature

1. Pilot-oriented mode: internally piloted;
2. Structure in sliding column mode: good tightness and sensitive reaction;
3. Double control solenoid valves have memory function;
4. Internal hole adopts special processing technology which has little attrition friction, low start pressure and long service life;
5. No need to add oil for lubrication;
6. Affiliated manual devices are equipped to facilitate installation and debugging;
7. Several standard voltage grades are optional;
8. Integrate with the manifold to save installation space.

Flow chart

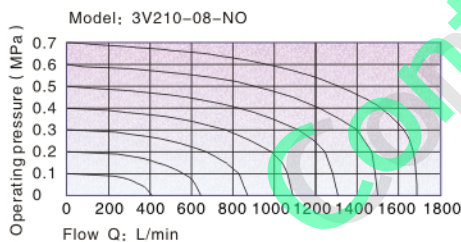

Specification

Model	3V210-06	3V220-06	3V210-08	3V220-08
Fluid	Air (to be filtered by 40um filter element)			
Acting	Internal piloted			
Port size ①	In=Out=1/8"		In=Out=1/4"	
Orifice size	14.0mm ² (Cv=0.78)		16.0mm ² (Cv=0.89)	
Valve type	3 port 2 position			
Lubrication ②	Not required			
Operating pressure	0.15~0.8MPa(21~114Psi)			
Proof pressure	1.5MPa(215Psi)			
Temperature °C	-20~70			
Material of body	Aluminum alloy			

① PT thread, NPT thread and G thread are available;


② It can not stop in the midway of lubricating. Lubricants like ISO VG32 or equivalent are recommended.

Coil specification

Item	Specification
Standard voltage	AC220V, AC110V, AC24V, DC24V, DC12V
Scope of voltage	AC: ±15% DC: ±10%
Power consumption	AC: 3.5VA DC : 3.0W
Protection	IP65 (DIN40050)
Temperature classification	B Class
Electrical entry	Terminal, Grommet
Activating time	0.05 sec and below
Max. frequency ①	5 cycle/sec

① The maximum actuation frequency is in the no-load state.

Ordering code

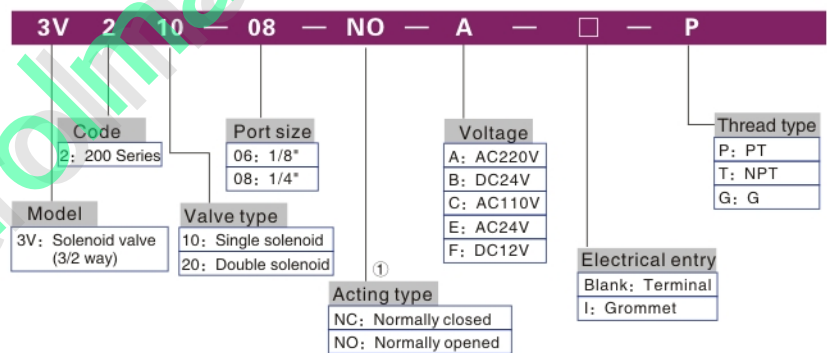

①Remark: 2 position double control solenoid valves have no differences between normally opened and normally closed state, thus this code is blank. Please refer to PI-33 for manifold specification and the order way.



Solenoid valve (3/2 way)

3V200 Series

Inner structure

■ Dimensions

3V210

NO.	Item	NO.	Item	NO.	Item
1	Fixed plate	8	O-ring	15	Piston
2	Manual override	9	Body	16	Pilot screw
3	Override spring	10	Spool spring	17	O-ring
4	Piston O-ring	11	Bottom cover gasket	18	Armature
5	Pilot body	12	Bottom cover	19	Coil
6	Spool packing	13	Screw	20	Coil nut
7	Spool	14	Wear ring	21	Connector

3V220

Item \ Model	3V210-06	3V210-08
A	27.7	28.7
B	0	1.5
C	22	22.5
D	16.7	16.45

Item \ Model	3V210-06	3V210-08
A	27.7	28.7
B	0	1.5
C	22	22.5
D	16.7	16.45

Item \ Model	3V220-06	3V220-08
A	81.4	82.4
B	0	1.5
C	22	22.5
D	70.4	70.15

Item \ Model	3V220-06	3V220-08
A	81.4	82.4
B	0	1.5
C	22	22.5
D	70.4	70.15